NOTES:


1. DO NOT SCALE FROM THIS DRAWING.

2. EDGES TO BE ROUNDED WITH A MINIMUM RADIOUS OF 0.177" (4.5mm)

3. ALL DIMENSIONS ARE IN INCHES & MM, UNLESS OTHERWISE SPECIFIED.

4. ALL UNDIMENSIONED PICTORIAL CONFIGURATIONS ARE FOR REFERENCE ONLY.

4. ALL UNDIMENSIONED PICTORIAL CONFIGURA
5. FINISH:
 CHEM FILM 5541 TYPE II CLASS 3 AND
 PAINT IAW MIL-T-704, TYPE G.
 COLOR TO BE WHITE IAW FED-STD-595
 COLOR CHIP NUMBER FS 17925.
6. ALL ALUMINUM SURFACES CLEAR IRRIDITED.
7. SILK-SCREEN IN BLACK EPOXY INK.
8. UNIT WEIGHT: ≤ 23 KG (≤ 50.7LB).

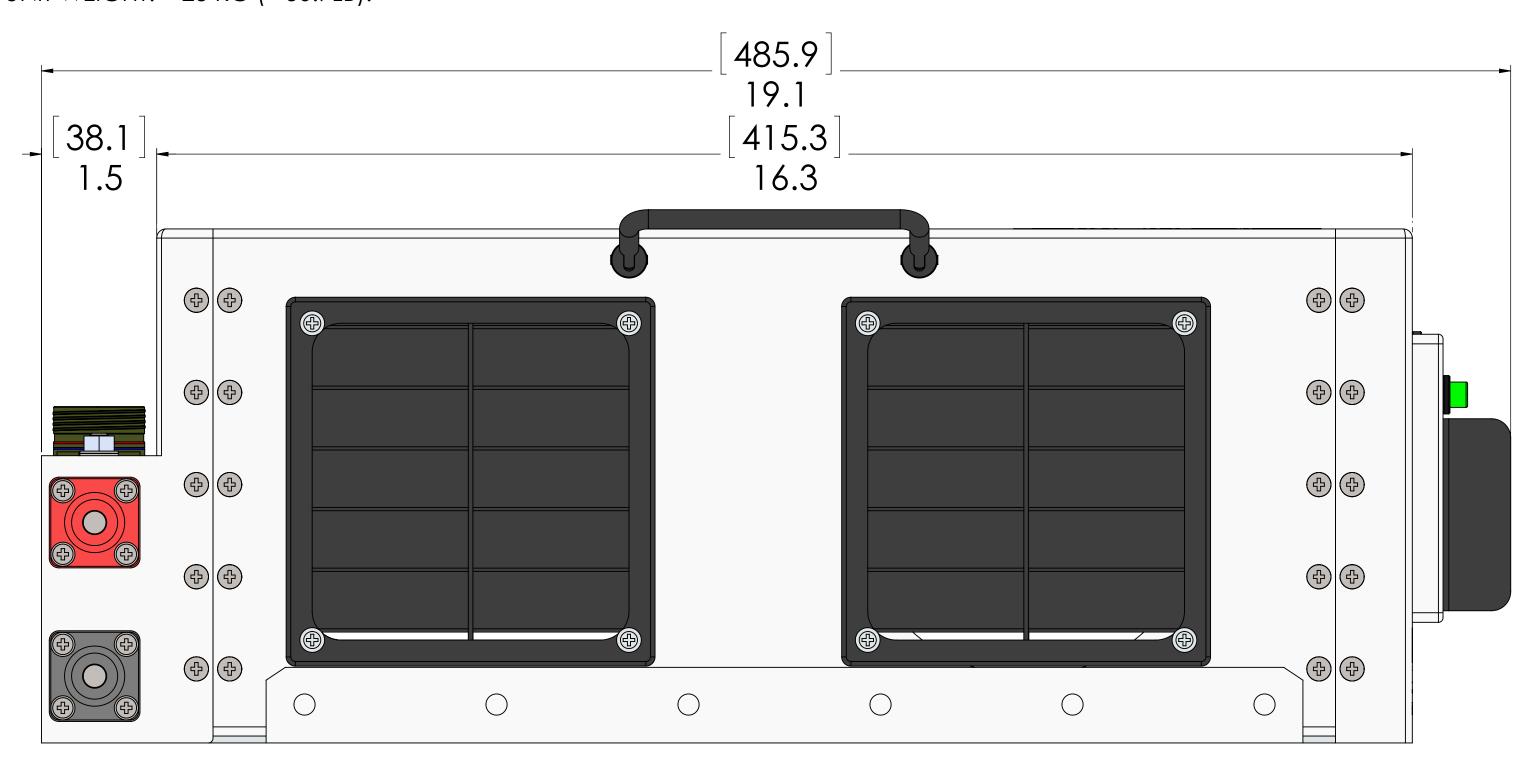


D38999	/ 20ZE6SN			
J2 - AC OUTPUT				
A-B	LINE			
C-D	NEUTRAL			
E-F	GND			

D38999 / 20ZD5SN					
J3 - AUX & TEMP SENSOR					
A	LINE				
В	NEUTRAL				
С	GND				
D	TEMP. SENSOR - 1				
Е	TEMP. SENSOR - 2				


RL-9-080-103-F1					
J	15 & J6 - DC INPUT				
+	RL-9-080-103-F1-RE				
_	RL-9-080-103-F1-BK				

D38999 / 20ZE6PN						
J4 - ,	AC INPUT 115V					
A-B	LINE					
C-D	NEUTRAL					
E-F	GND					

REVISIONS								
	REV.	DESCRIPTION	DATE	APP.				

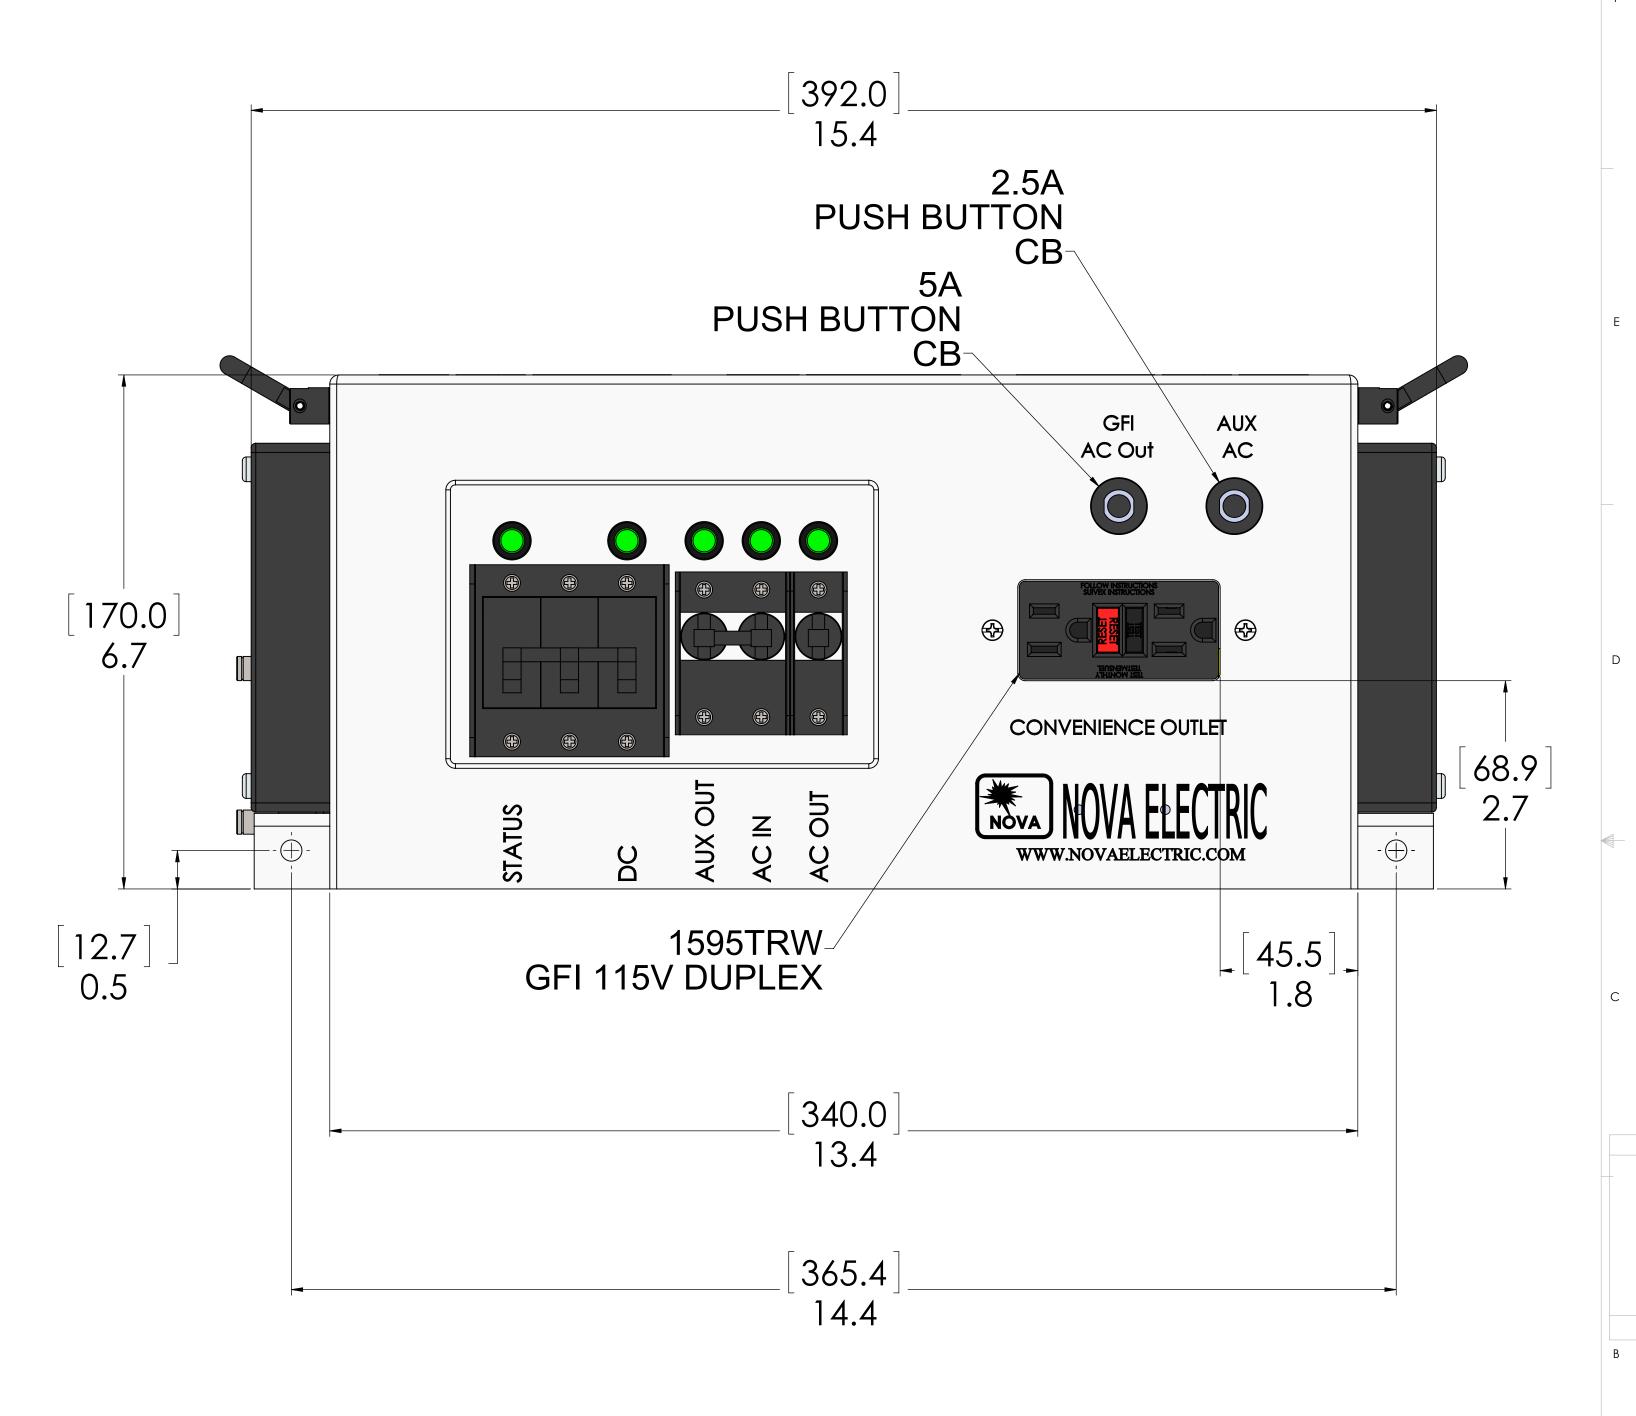

DO NOT SCALE DRAWING	THIS DRAWING IN DESIGN AND DETAIL IS NOVA ELECTRIC PROPERTY		THIRD ANGLE PROJECTION		M _M	4	NOVA ELECTRIC			
MATL/INPREGNATION	AND MUST NO CONNECTION	DT BE USED EXCEPT IN IN WITH OUR WORK. TS OF DESIGN OR	DRAWN	DATE	N(N OVA	100 S	CHOOL S		
	_	N ARE RESERVED.	GLC	7/28/16	115	\/AC	3KV Inve	ortor C	haraer	Unit
FINISH:		ESS OTHERWISE SPECIFIED	GLC	DATE 7/28/16	113		BC3K-24			OTIII
-	$.XX = \pm .02$ $.XXX = \pm .005$ ANGLE = $\pm 1/2^{\circ}$	DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED	APPROVED	DATE	D					
HTTP://WWW.N	OVAELECTRI	C.COM	SCALE:	SCALE	SIZE	CAG	E: 29019	SHEET:	PAGE	REV.

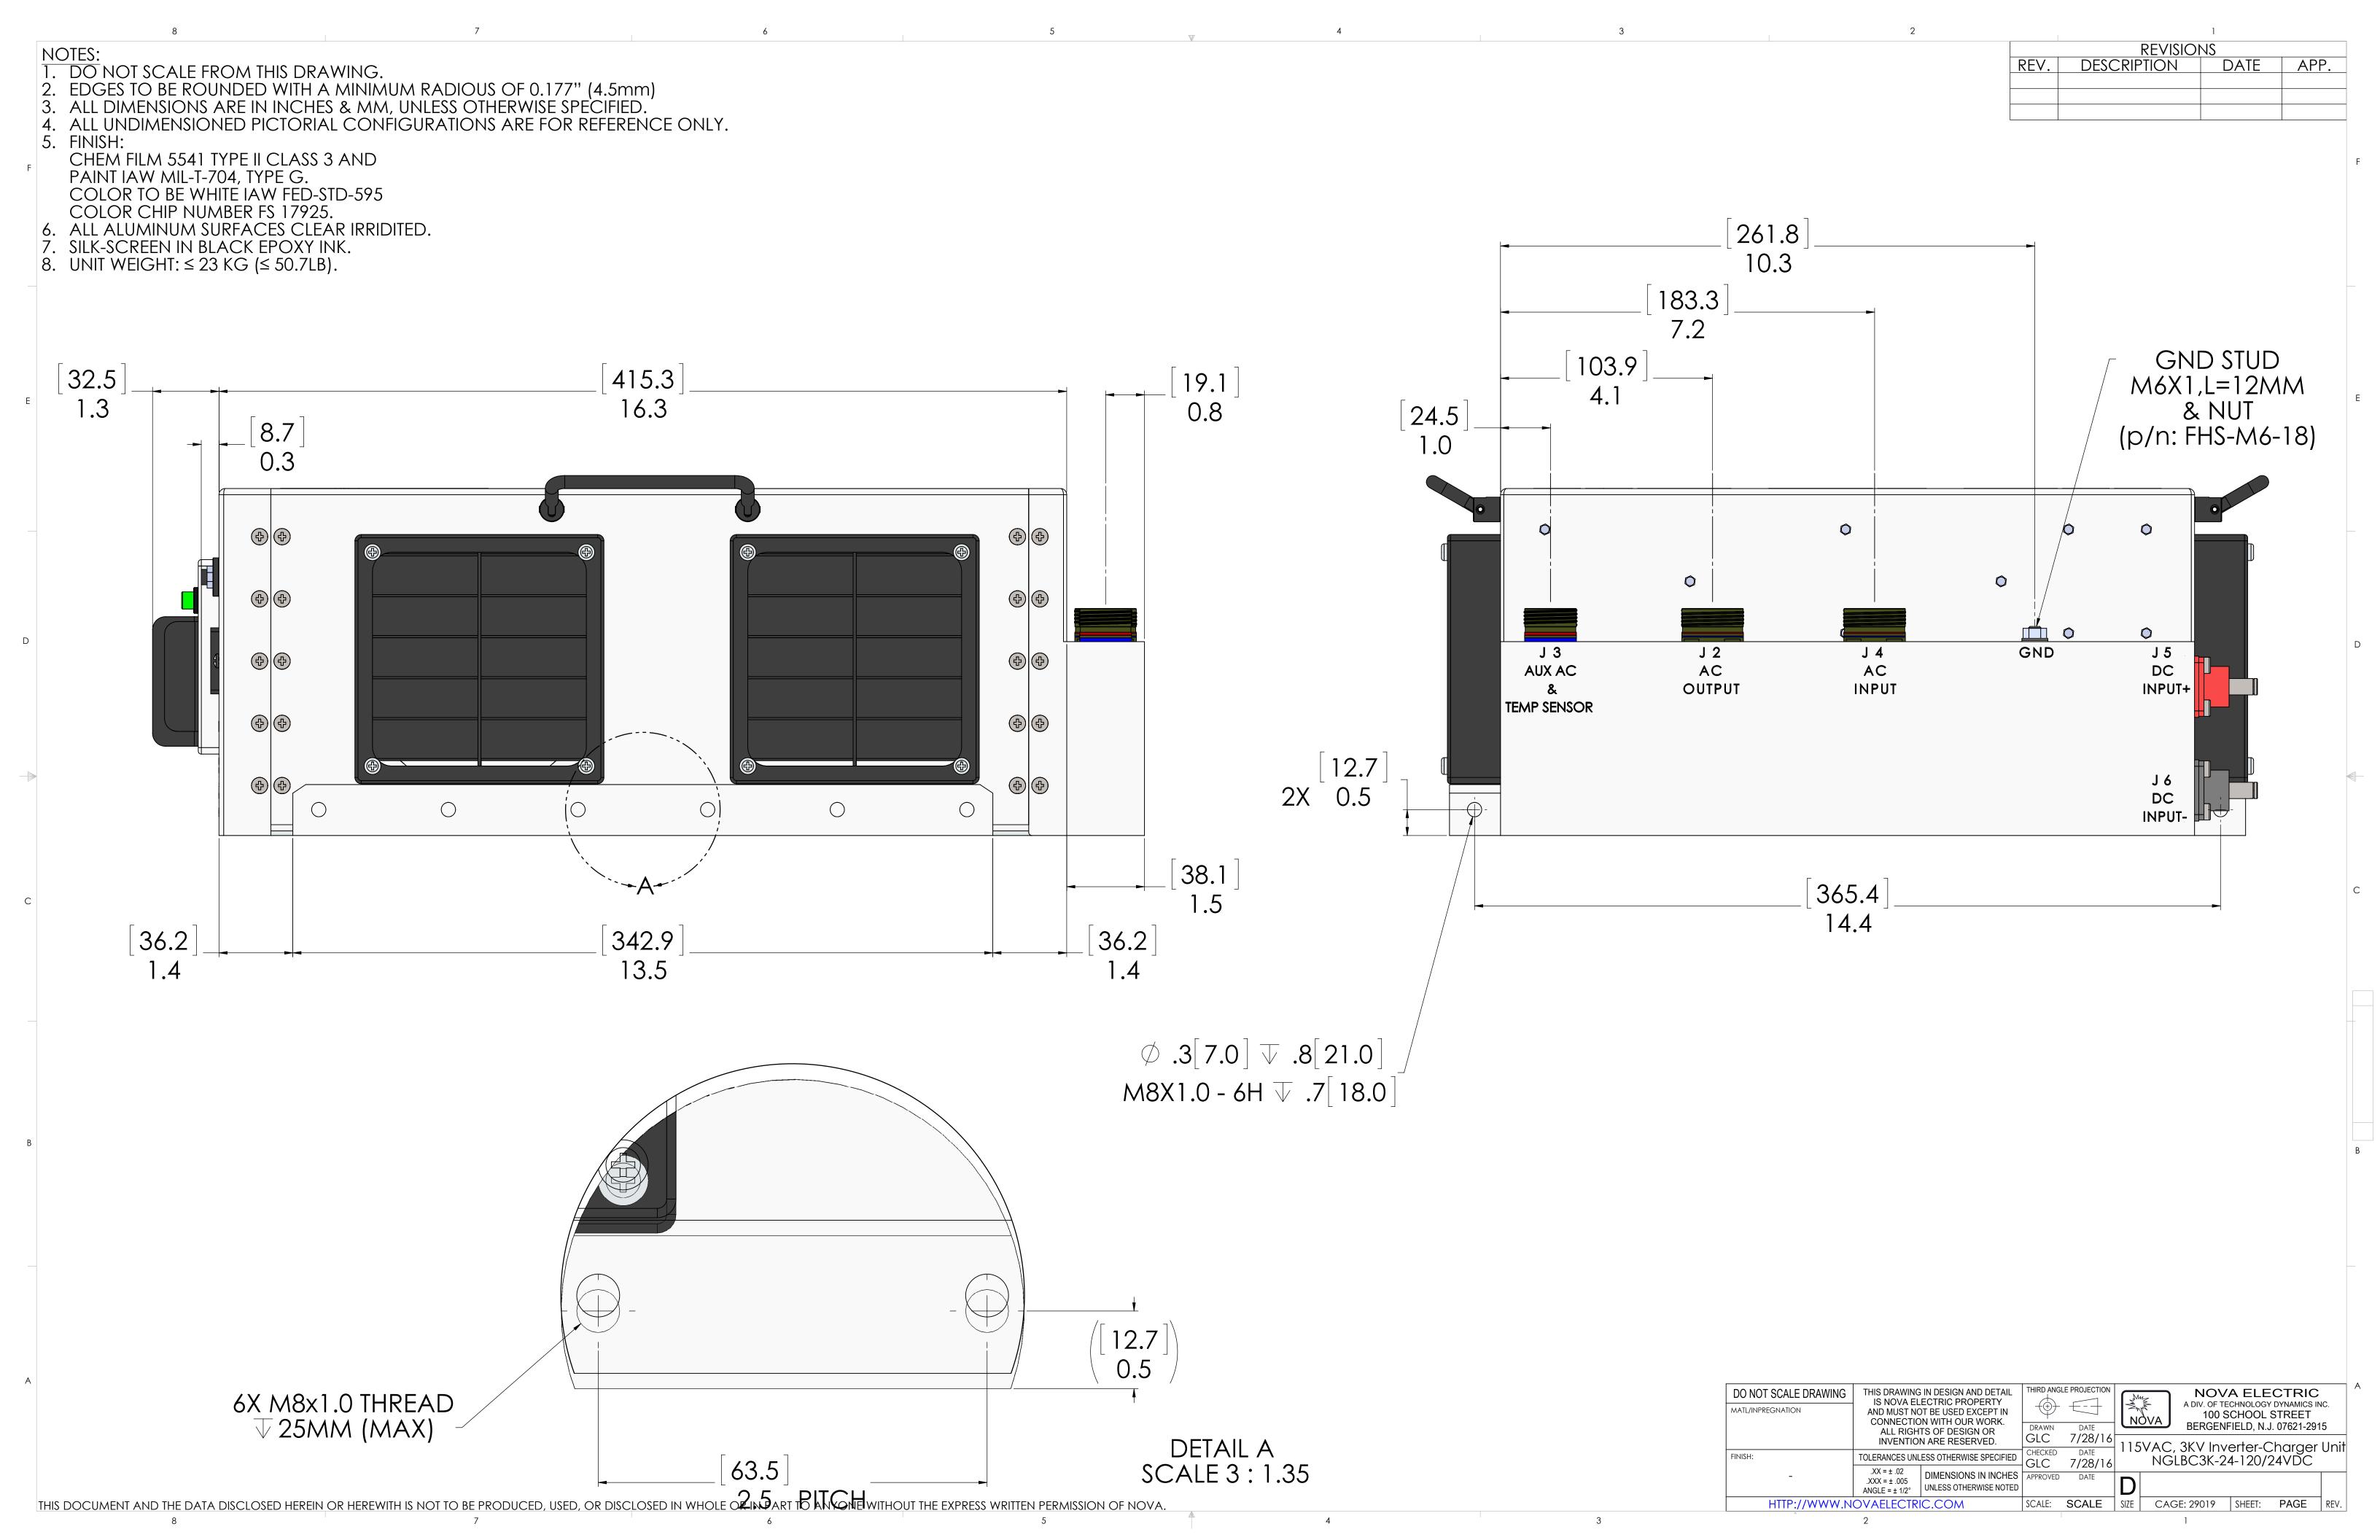

NOTES:


1. DO NOT SCALE FROM THIS DRAWING.


2. EDGES TO BE ROUNDED WITH A MINIMUM RADIOUS OF 0.177" (4.5mm)

3. ALL DIMENSIONS ARE IN INCHES & MM, UNLESS OTHERWISE SPECIFIED.

4. ALL UNDIMENSIONED PICTORIAL CONFIGURATIONS ARE FOR REFERENCE ONLY.

4. ALL UNDIMENSIONED PICTORIAL CONFIGURA
5. FINISH:
 CHEM FILM 5541 TYPE II CLASS 3 AND
 PAINT IAW MIL-T-704, TYPE G.
 COLOR TO BE WHITE IAW FED-STD-595
 COLOR CHIP NUMBER FS 17925.
6. ALL ALUMINUM SURFACES CLEAR IRRIDITED.
7. SILK-SCREEN IN BLACK EPOXY INK.
8. UNIT WEIGHT: ≤ 23 KG (≤ 50.7LB).

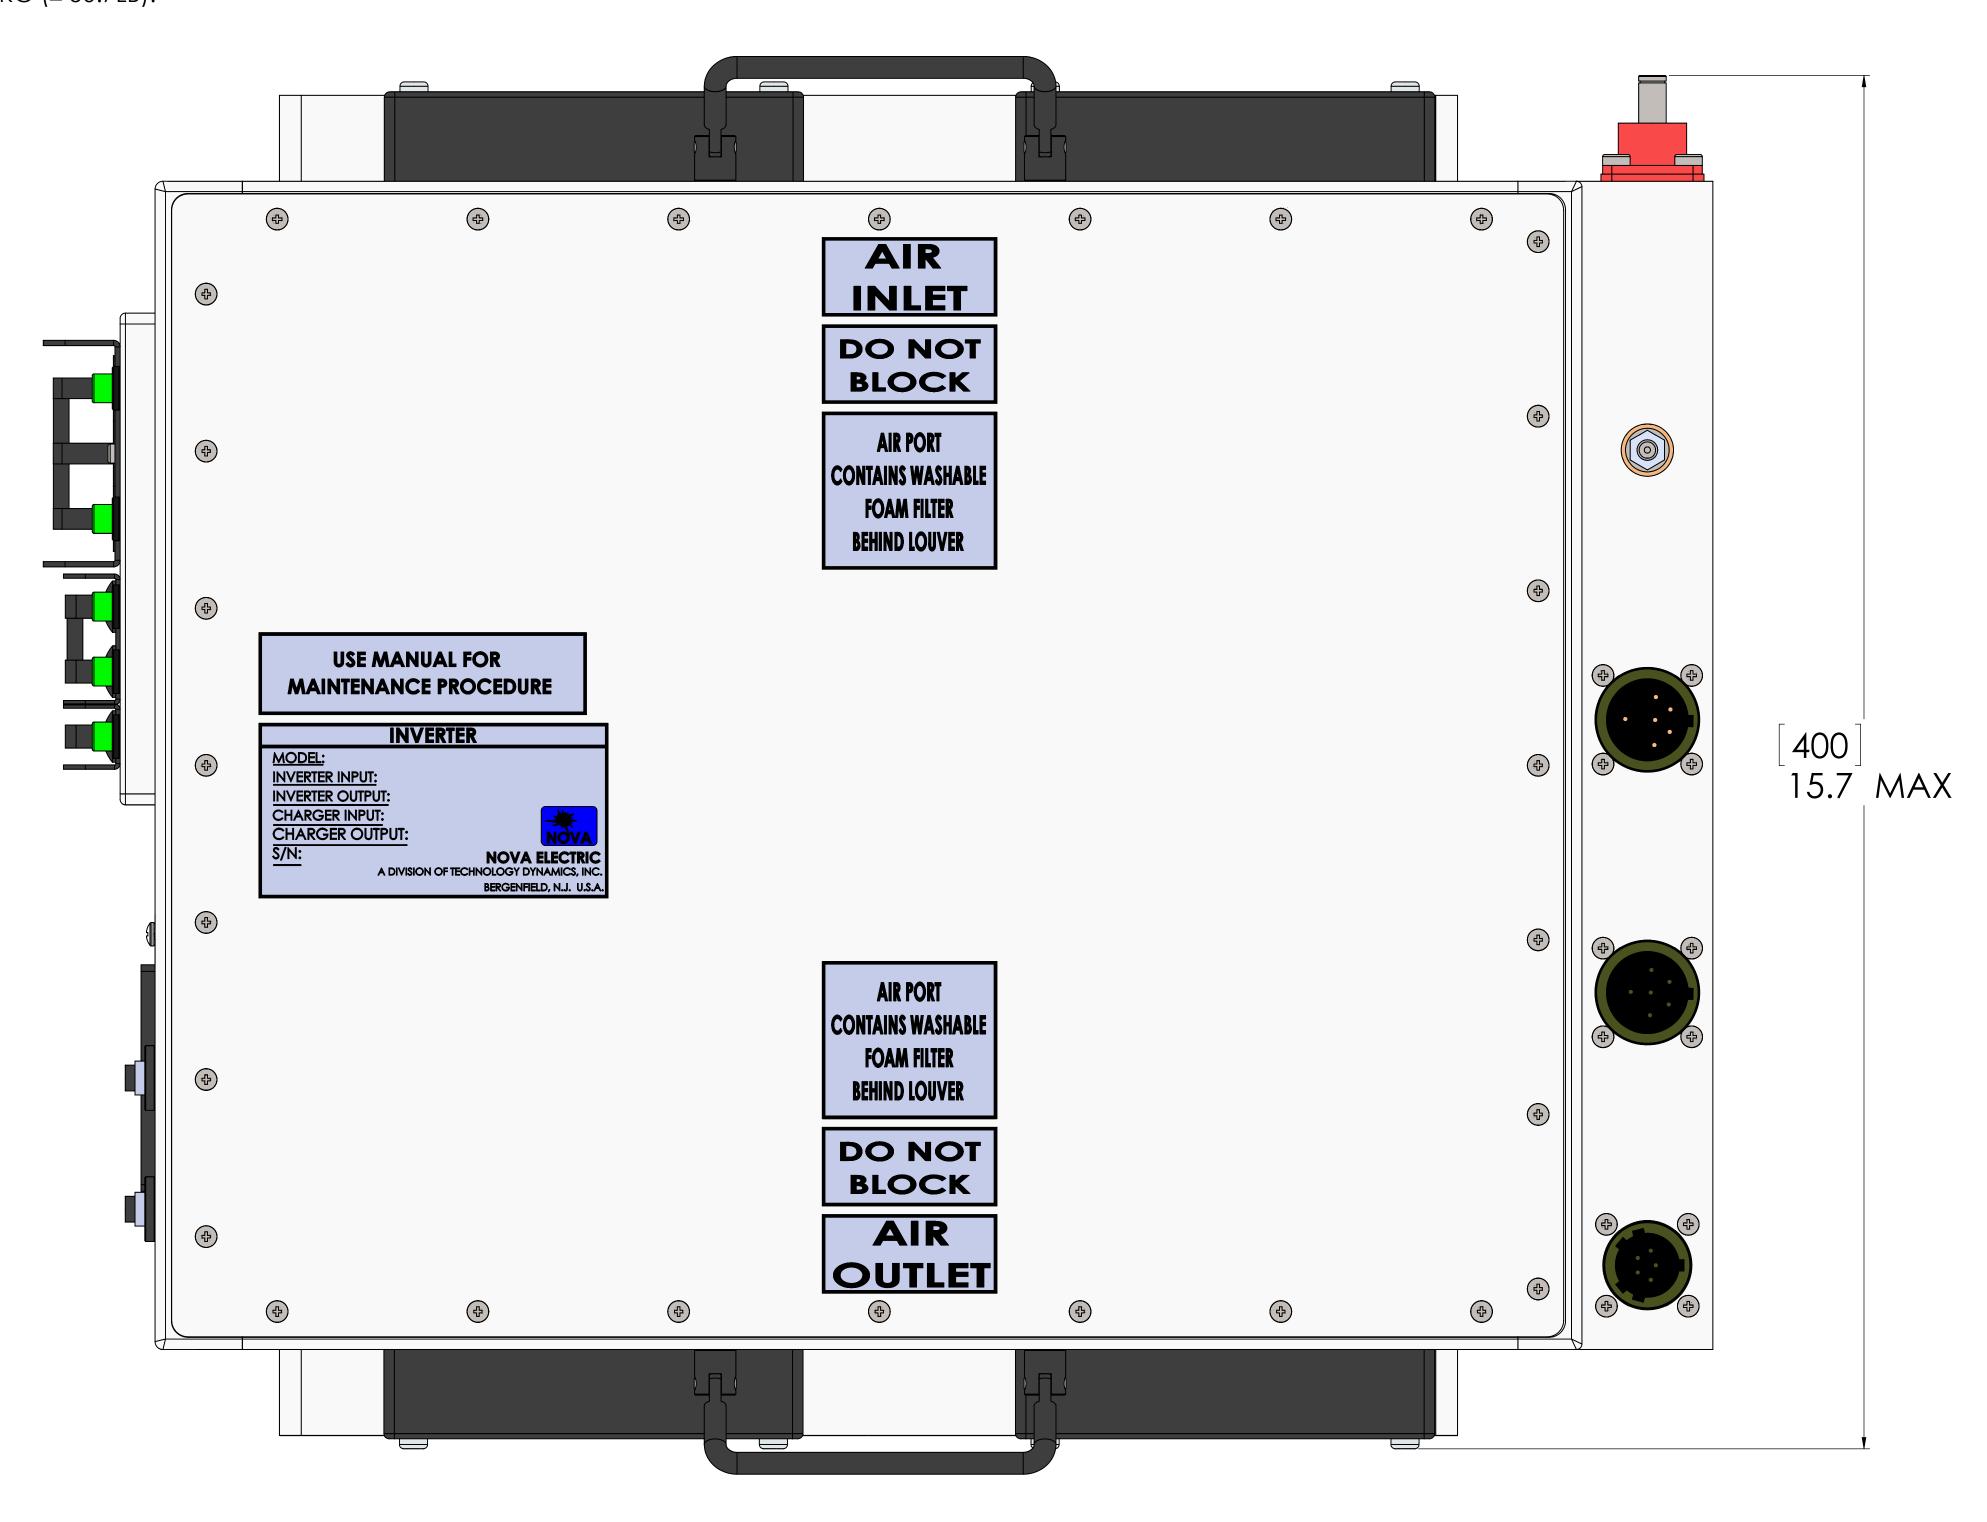

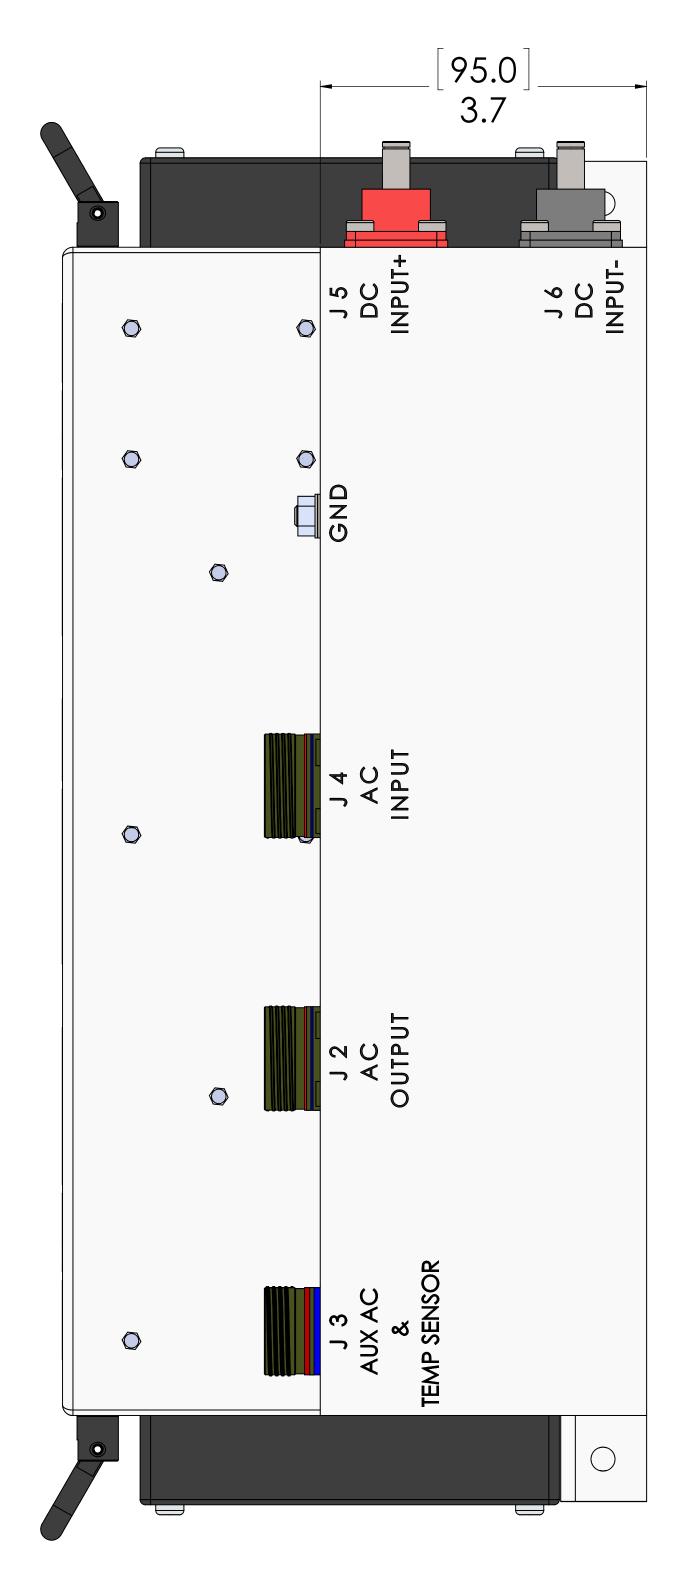

REVISIONS REV. DESCRIPTION DATE APP.

DO NOT SCALE DRAWING	THIS DRAWING IN DESIGN AND DETAIL IS NOVA ELECTRIC PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.		THIRD ANGLE PROJECTION		NOVA ELECTRIC A DIV. OF TECHNOLOGY DYNAMICS INC.					
MATL/INPREGNATION			(+)	DATE	-W.	NOVA	A DIV. OF TECHNOLOGY DYNAMICS INC. 100 SCHOOL STREET BERGENFIELD, N.J. 07621-2915			
			GLC	7/28/16	115	<u></u>	C, 3KV Inverter-Charger U			$\overline{}$
FINISH:	TOLERANCES UNLESS OTHERWISE SPECIFIED		GLC	DATE 7/28/16	113	NGLBC3K-24-120/24VDC				OTILL
-	$.XX = \pm .02$ $.XXX = \pm .005$ ANGLE = $\pm 1/2^{\circ}$	DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED	APPROVED	DATE	D					
HTTP://WWW.NOVAELECTRIC.COM			SCALE:	SCALE	SIZE	CAG	E: 29019	SHEET:	PAGE	REV.

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE PRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE EXPRESS WRITTEN PERMISSION OF NOVA.