


REV	DESCRIPTION	BY	APP.	DATE
1				
2				
3				
4				
5				
6				
7				
8				

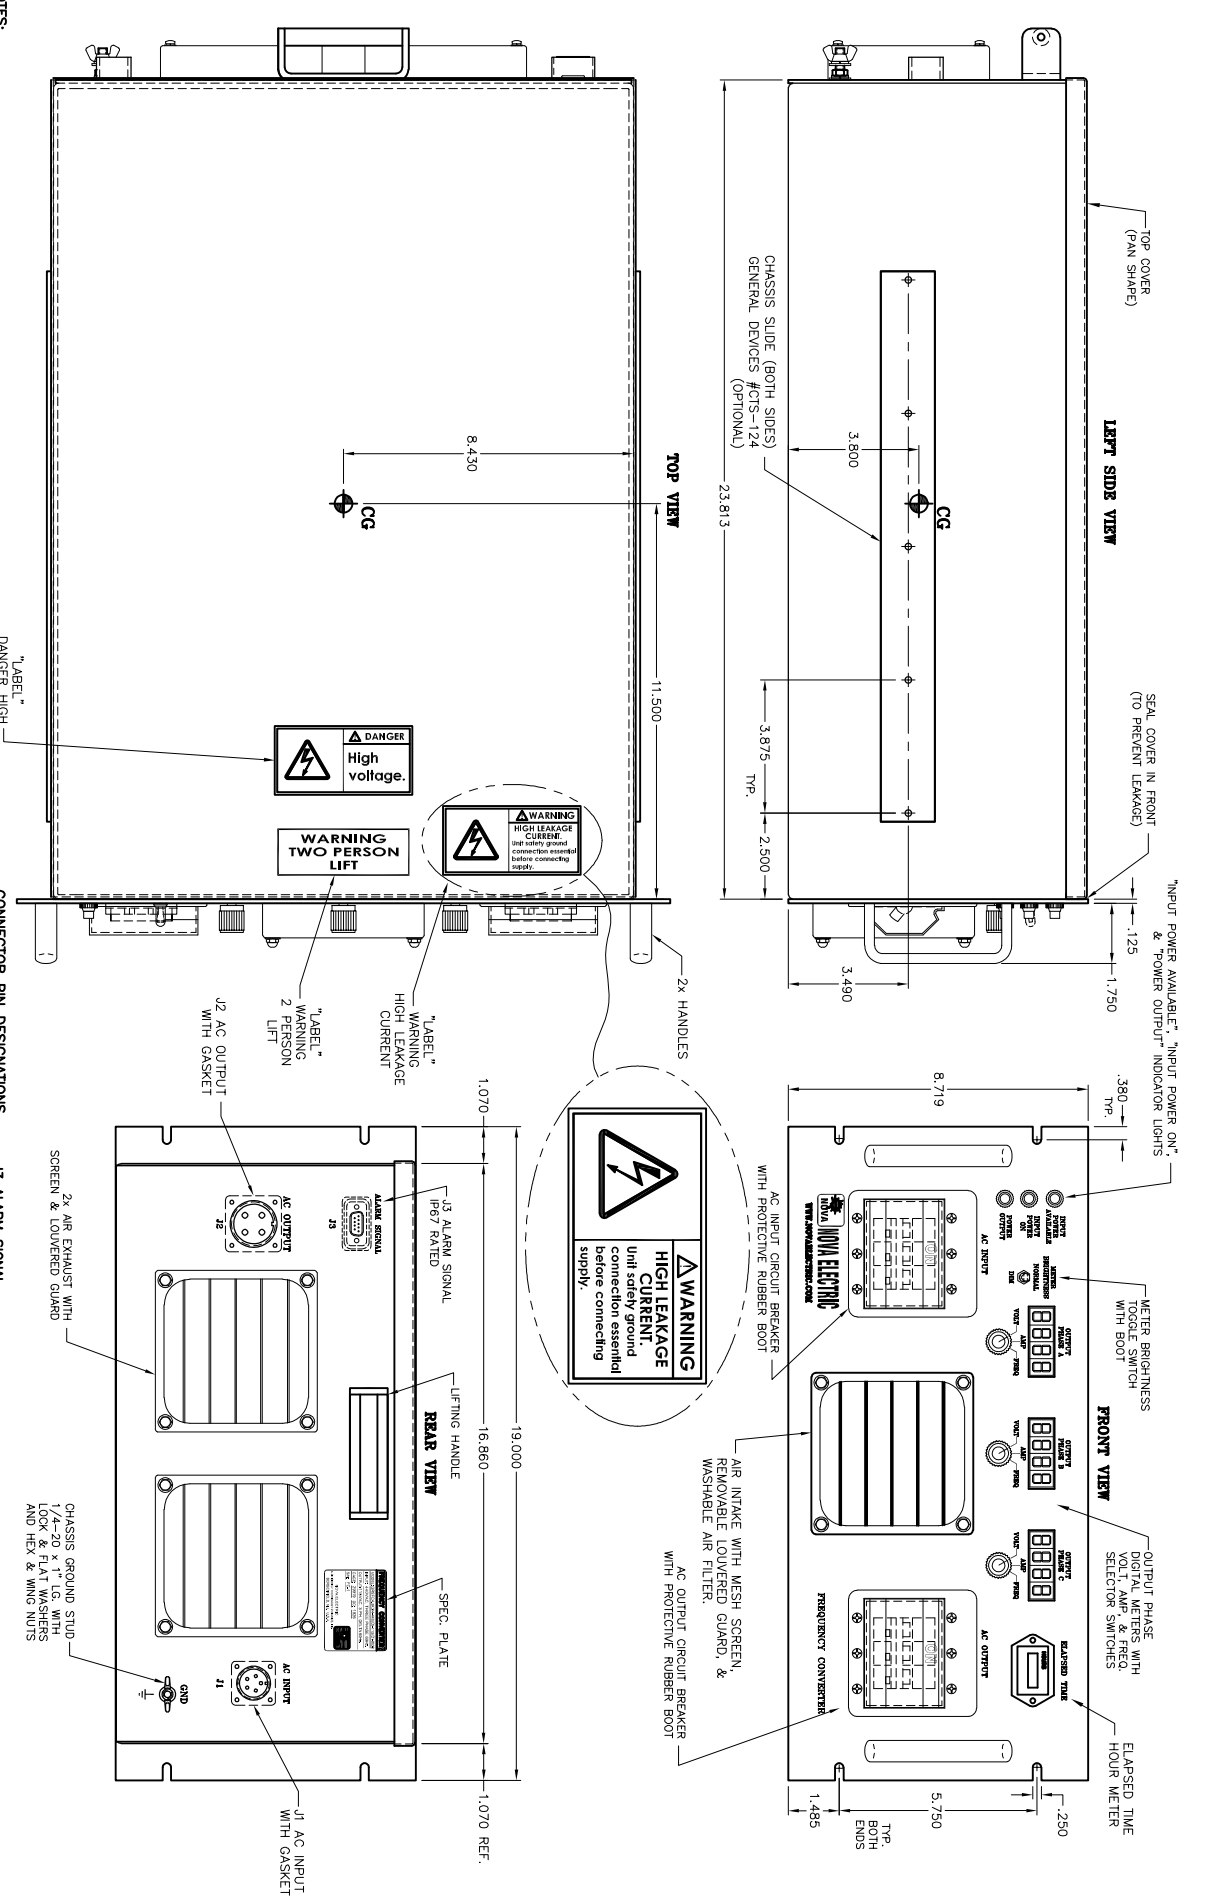

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
 2. ALL UNIT-DIMENSIONED PICTORIAL CONFIGURATIONS ARE FOR REFERENCE ONLY.
 3. FRONT AND REAR MARKING FOR REFERENCE ONLY.
 4. FRONT PANEL FINISH: CLEAR IRRIDITE, THEN PRIME & PAINT FRONT SURFACE (AND ALL EDGES - ANSI #61 GRAY SEMI-GLOSS, ALL OTHER SURFACES ARE IRRIDITED (ALUMINUM)).
 5. FRONT PANEL SILKSCREEN IN BLACK EPOXY INK.
 6. UNIT THOROUGHLY RUGGEDIZED.
 7. APPROXIMATE WEIGHT: 75 LBS.
 8. IP54 RATED.

J1 AC INPUT CONNECTOR PIN DESIGNATIONS

ATZ-16S-8PS-724	ATZ-22-2SS-724
ATZEL #S: 8S-724	ATZEL #S: 2S-724
PHASE A	PHASE A
PHASE B	PHASE B
PHASE C	PHASE C
GROUND	GROUND
NOT USED	

J2 AC OUTPUT CONNECTOR PIN DESIGNATIONS

ATZ-16S-8PS-724	ATZ-22-2SS-724
ATZEL #S: 8S-724	ATZEL #S: 2S-724
PHASE A	PHASE A
PHASE B	PHASE B
PHASE C	PHASE C
GROUND	GROUND
NOT USED	

J3 ALARM SIGNAL WPSDIP

PIN	DESCRIPTION
1	N/C OVER TEMP
2	ARM OVER TEMP
3	N/O OVER TEMP
4	N/C INV. ON/OFF
5	ARM INV. ON/OFF
6	N/O INV. ON/OFF
7-9	SPARE

PAPER COPIES SHALL BE SHREDDED WHEN NO LONGER REQUIRED. ELECTRONIC COPIES SHALL NOT BE DISCLOSED OUTSIDE OF THE INTENDED RECIPIENTS.

THIS DOCUMENT CONTAINS INFORMATION WHICH IS CONFIDENTIAL AND MAY BE CONSIDERED SUI GENERIS. IT SHOULD BE PROTECTED IN ACCORDANCE WITH ESTABLISHED POLICIES AND PROCEDURES UNLESS OTHERWISE SPECIFIED.

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS IN INCHES
 DEC = ± .005
 FRA = ± .002
 ANG = ± 1/2°
 UNLESS OTHERWISE NOTED

WWW.NOVAELECTRIC.COM

NOVA ELECTRIC
 A DIV. OF TECHNOLOGY FINANCIAL INC.
 10000 W. 10TH AVE., SUITE 100
 DENVER, CO 80201
 TEL: 303.751.2915
 FAX: 303.751.2916

OUTLINE DRAWING
 9812460
 1 of 1 REV