
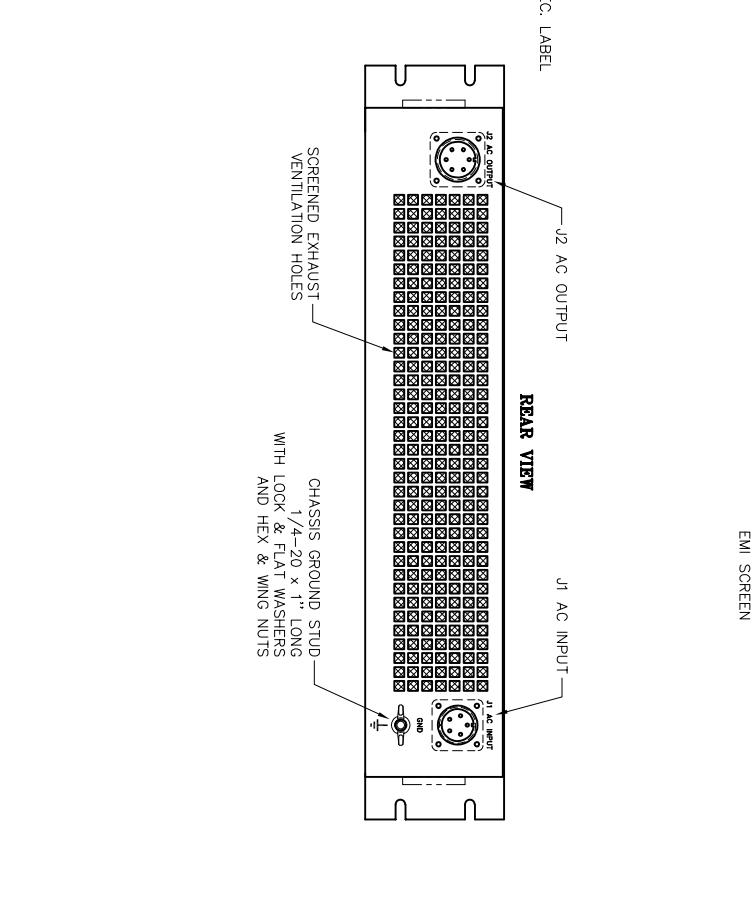
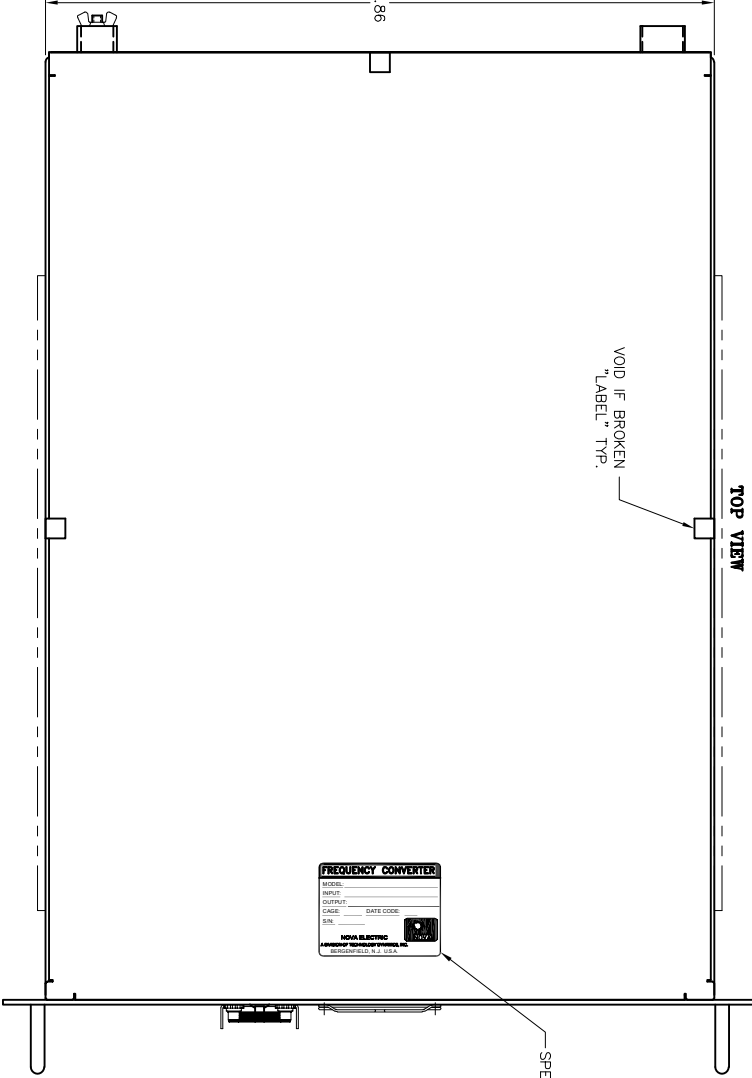
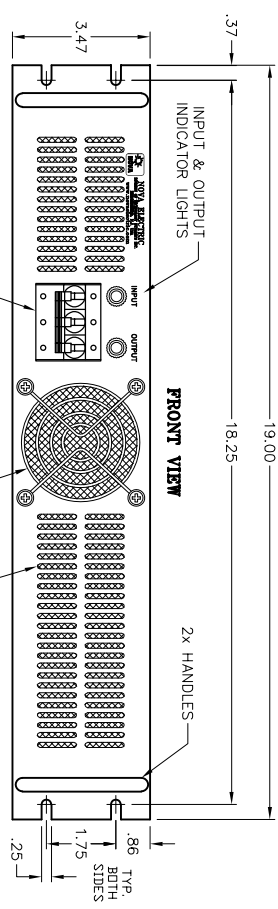


REVISIONS		BY	APR	DATE
1				
2				

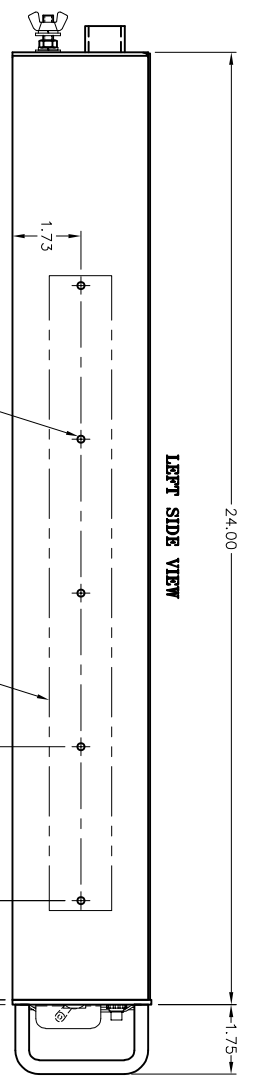

CONNECTOR PIN DESIGNATIONS

J1 AC INPUT		J2 AC OUTPUT	
FILE	MS3102R16S-8P	FILE	MS3102R18-12S
PIN DESCRIPTION	MS3106F16S-8S	PIN DESCRIPTION	MS3106E18-12P
A	PHASE A	A	PHASE A
B	PHASE B	B	PHASE B
C	PHASE C	C	PHASE C
D	NEUTRAL	D	NEUTRAL
E	GROUND	E	GROUND
		F	NOT USED

PAPER COPIES SHALL BE SHREDED WHEN NO LONGER REQUIRED. ELECTRONIC COPIES SHALL NOT BE DISCLOSED OUTSIDE OF THE INTENDED RECIPIENTS.

THIS DOCUMENT CONTAINS INFORMATION WHICH IS CONFIDENTIAL, MAY BE REPRODUCED OR DISCLOSED TO ANY OTHER PERSON OR ORGANIZATION WITHOUT THE WRITTEN PERMISSION OF NOVA ELECTRIC, INC. SUCH REPRODUCTION SHOULD BE PROTECTED IN ACCORDANCE WITH ESTABLISHED PROCEDURES & POLICIES. TOLERANCES UNLESS OTHERWISE SPECIFIED:

X = ± .010
Y = ± .015
Z = ± .020
ANGLE = ± 1/2°
DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED

NOVA ELECTRIC
A DIV. OF TECHNOLOGY DRIVING, INC.
100 SCHOOL STREET
BROOKFIELD, N.J. 07021-2918
3U CHASSIS

DATE: 5/19/22
APPROVED: [Signature]
M.L. 5/19/22

9981123

DO NOT SCALE

- NOTES:**
1. ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.
 2. ALL UNDIMENSIONED PICTORIAL CONFIGURATIONS ARE FOR REFERENCE ONLY.
 3. FRONT AND REAR MARKINGS FOR REFERENCE ONLY.
 4. FRONT PANEL PAINTED - ANSI #61 GRAY SEMI-GLOSS.
 5. FRONT PANEL SILK-SCREEN IN BLACK EPOXY INK.