

CGL 1.5K SERIES PURE SINEWAVE INVERTER 1500W / 2000VA

12, 24, or 48VDC

120V 50/60 HZ or 220V 50/60HZ Output



APPLICATIONS

Nova Electric's CGL-Series inverters are intended for commercial and industrial applications wherever pure sinewave power is needed at 50 or 60 Hz.

These inverters are ideal for running electronic loads such as computers, monitors, printers, telecom systems, radios, fluorescent lamps from batteries, field generators, and solar electro-voltaic panels. They can also drive hand drills, motors and small compressors – please consult the factory for proper sizing.

These CGL models can also be optionally ruggedized against shock, vibration, and humidity for military applications including vehicle mounted, shipboard, submarine, aircraft, and ground fixed shelters.

- Computers
- Monitors
- Printers
- Electric Tools
- RVs
- Sail Boats
- Photo Voltaic
- Instruments
- Appliances
- Military



NOVA ELECTRIC
www.novaelectric.com
novasales@theallpower.com

AS 9100

BUREAU VERITAS
Certification
Certificate No. 12006247-1



A Leader in Inverter Technology since 1966 - 500VA to 500+KVA

CGL-SERIES PURE SINE WAVE DC-AC INVERTER

SPECIFICATIONS

FEATURES

- True sinewave output
- THD < 3%
- RS232 interface
- CR5 Remote control optional
- Input and output fully isolated
- Thermostat controlled cooling fan
- Advanced microprocessor control
- Output voltage switch selectable
- Output frequency 50/60 Hz switch selectable
- "Power Saver" mode for energy conservation
- Front panel LED meters and alarms
- CE approved

ELECTRICAL

Input Voltage: 12, 24 or 48VDC
 Output Voltage 110V models: 100/110/120 VAC
 Output Voltage 230V models: 220/230/240 VAC
 Rated Power: 1500W
 Surge Power: 2000W
 Frequency: 50 or 60 HZ switch selectable
 AC Regulation: +/- 3%
 Std. Receptacles 110V models: NEMA5-15r
 Std. Receptacles 220V models: Schuko
 Led Indicators: OVP, UVP, OTP, input voltage level, output load level, and fault status

ENVIRONMENTAL

Operating Temp: -20° to +50°C
 Storage Temp Range: -40° to +71°C
 Humidity: to 95% non condensing

SAFETY & EMC

Safety Standards: UL458
 (with optional GFCI outlet only)
 Isolation Resistance: I/P - O/P: 100M Ohms / 500VDC

FOR 110V Models

EMI Conduction and Radiation:
 Compliance to FCC class A

FOR 230V Models

EMI Conduction and Radiation:
 Compliance to EN55022 class A
 EMS Immunity: Compliance to EN61000-3-2,3

LVD: Compliance to EN60950-1
 e-MARK: Compliance to e-13 *
 72/245/EEC, 95/54/EC


PROTECTIVE FEATURES

- Input reverse polarity
- Undervoltage
- Overvoltage
- Output short circuit
- Overload
- Overtemperature

MODEL SELECTION

	CGL1.5KVA-12-120	CGL1.5KVA-24-120	CGL1.5KVA-48-120	CGL1.5KVA-12-220	CGL1.5KVA-24-220	CGL1.5KVA-48-220
DC Voltage	12VDC	24VDC	48VDC	12VDC	24VDC	48VDC
Voltage Range	10.5~15.0VDC	21.0~30.0VDC	42.0~60.0VDC	10.5~15.0VDC	21.0~30.0VDC	42.0~60.0VDC
Efficiency (Typ.)	87.0%	90.0%	92.0%	90.0%	93.0%	94.0%
Low VDC Alarm	11VDC	22VDC	44VDC	11VDC	22VDC	44VDC
Low VDC Shutdown	10.5VDC	21.0VDC	42.0VDC	10.5VDC	21.0VDC	42.0VDC
Over Voltage	15.3VDC	30.6VDC	61.2VDC	15.3VDC	30.6VDC	61.2VDC
No Load Current draw	0.87A	0.43A	0.23A	0.83A	0.43A	0.22A
Weight	15.5 pounds / 7.0 Kg.					

MECHANICAL SPECIFICATIONS

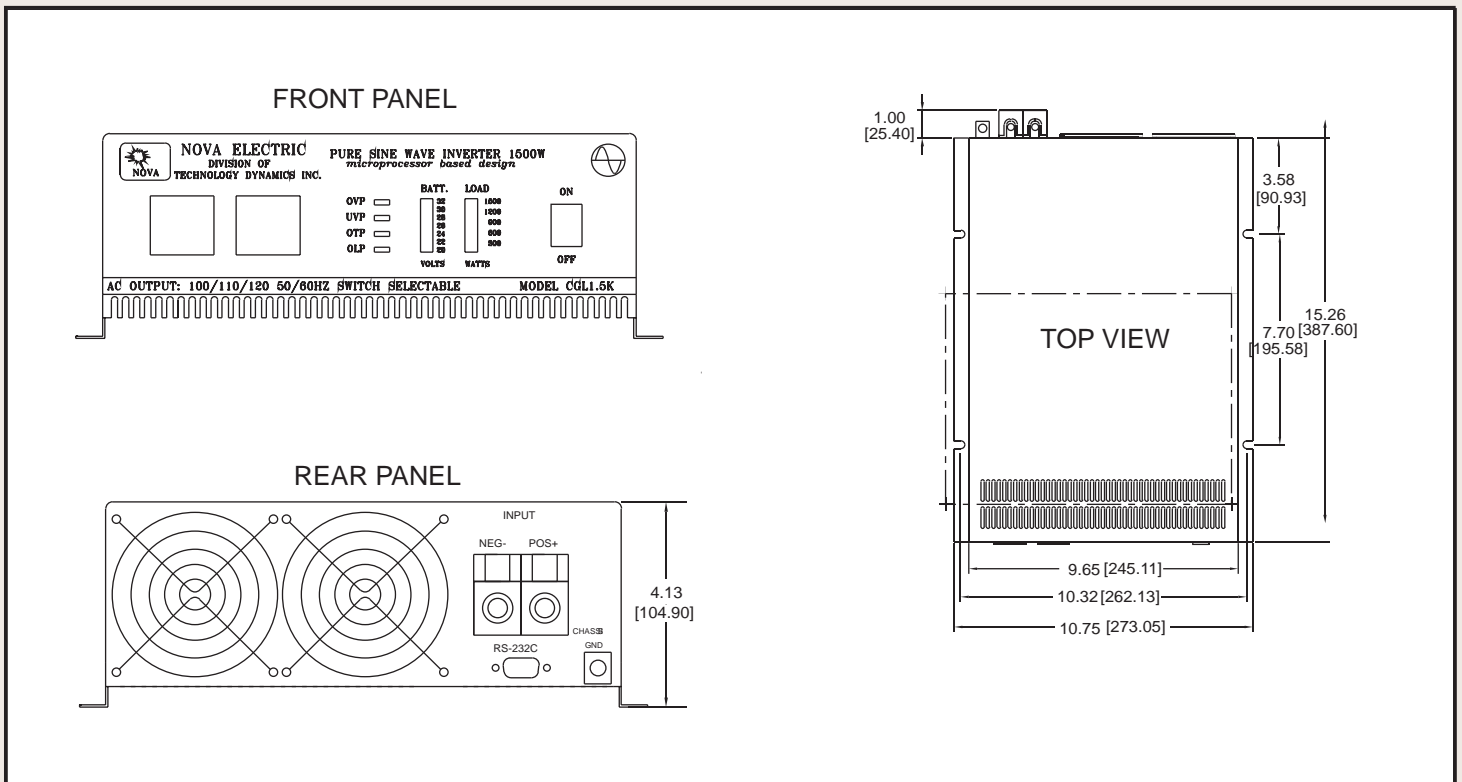

WEB : www.novaelectric.com

E-Mail : novasales@theallpower.com

PHONE : (201) 385-0500 FAX : (201) 385-0702



NOVA ELECTRIC

A Division of

TECHNOLOGY DYNAMICS, INC.

100 School St., Bergenfield NJ 07621

AS 9100
 BUREAU VERITAS
 Certification

